


HENDERSON

GARAGE DOORS



Georgian
Panel Door

Standard &
Heavy Duty
Door

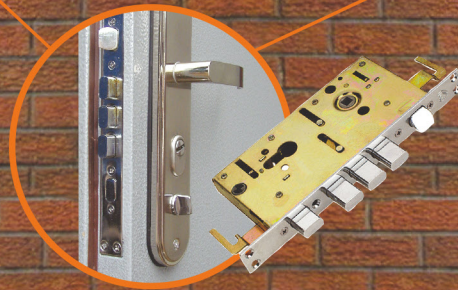

Security Side
Entrance Door
From Henderson

Security Side Entrance Door Specification:

Georgian Panel Door

Frame:

- 4 x heavy duty lift-off hinges
- Expandable frame mechanism that achieves sizes between:
830-860 x 2075
880-940 x 2075
980-1040 x 2075
- Full weather seal to all sides of the frame
- 2 x fixing points down each side of frame for ease of installation
- Removable/adjustable threshold
- 2 mm thick pre-lacquered cold-rolled steel frame

Door Leaf:

- 1.2 mm thick pre-lacquered cold-rolled steel sheets
- 15 mm anti-jemmy lip to all edges
- Powder coated to RAL 9010 (white)
- 50 mm thick door leaf
- 2 x steel strengthening structural supports running through the leaf
- Doors filled with a fibre glass insulation

Standard Door

Frame:

- 4 x heavy duty lift-off hinges
- Expandable frame mechanism that achieves sizes between:
880-940 x 2075
980-1040 x 2075
- Full weather seal to all sides of the frame
- 2 x fixing points down each side of frame for ease of installation
- Removable/adjustable threshold
- 1.2 mm thick pre-lacquered cold-rolled steel frame

Door Leaf:

- 0.8 mm thick pre-lacquered cold-rolled steel sheets
- 15 mm anti-jemmy lip to all edges
- Powder coated to RAL 7045 (grey)
- 50 mm thick door leaf
- 2 x steel strengthening structural supports running through the leaf
- Doors filled with a fibre glass insulation

Heavy Duty Door

Frame:

- 4 x heavy duty lift-off hinges
- Expandable frame mechanism that achieves sizes between:
880-940 x 2075
980-1040 x 2075
- Full weather seal to all sides of the frame
- 2 x fixing points down each side of frame for ease of installation
- Removable/adjustable threshold
- 2 mm thick pre-lacquered cold-rolled steel frame

Door Leaf:

- 1.2 mm thick pre-lacquered cold-rolled steel sheets
- 15 mm anti-jemmy lip to all edges
- Powder coated to RAL 7045 (grey)
- 50 mm thick door leaf
- 2 x steel strengthening structural supports running through the leaf
- Doors filled with a fibre glass insulation

Standard For All Doors

Locking System:

- 9 - 12 point locking system pre-installed into door
- 2 x anti-jemmy hinge bolts
- Drill and impact proof locking system
- Operated by euro-profiled cylinder

Options For All Doors

- Powder coating to any RAL colour
- Height cut down
- Door closer's
- Friction stays
- Digital locking mechanism

Call today on 01244 345 255

1 - 3 Christleton Road Chester CH3 5UF

Email: sales@hendersonchester.co.uk

Web: www.hendersonchester.co.uk

PRO-TEC

garage door services

Daytime tel: 07817 469536

Eve tel: 01226 761506

email: chris@protecgaragedoors.co.uk



Based near Barnsley in South Yorkshire, PRO-TEC GARAGE DOORS are available to supply & install Garage Doors & Automation Systems throughout Yorkshire, including the following areas: Barnsley, Dewsbury, Cleckheaton, Heckmondwike, Liversedge, Batley, Horbury, Ossett, Bradford, Garforth, Pudsey, Morley, Leeds, York, Wetherby, Knottingley, Tadcaster, Kippax, Castleford, Pontefract, Normanton, Featherstone, Hemsworth, Selby, ~~6KH~~ ~~NOG5RWKHK~~ ~~KDP6WRFN~~ ~~ZLGH3H~~ ~~WRER~~ ~~OP~~ ~~W~~ ~~K~~ ~~G~~ ~~H~~ ~~NOG~~ ~~W~~ ~~K~~ ~~R~~ ~~M~~ ~~D~~ ~~O~~ ~~L~~ ~~D~~ ~~Q~~ ~~O~~ ~~D~~ ~~G~~ ~~:~~ ~~D~~ ~~N~~ ~~H~~ ~~A~~ ~~O~~ ~~G~~